

JAZ-P-1/2/4

Push-in socket

■ Features


- Push-in wiring with integrated push button for wiring connection.
- Connect via bridge.
- With printable labels.
- UL and CE certification.
- RoHS compliant.




Technical Data

Contact arrangement		1P	2P	4P
Nominal Load	Current (A)	16A	10A	8A
	Voltage (V)		300VAC	
Dielectric strength			2500VAC	
Stripping length			7mm	
Wire size			2x1.5mm ² 2x16AWG	
Spring locking force			≥60N	
Ambient temperature			-40~+85°C	

■ Socket Select Code

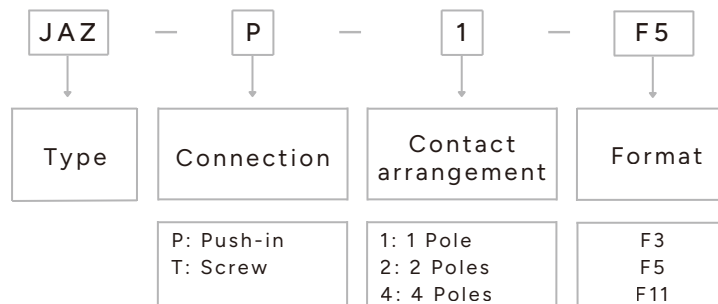

■ Dimensions

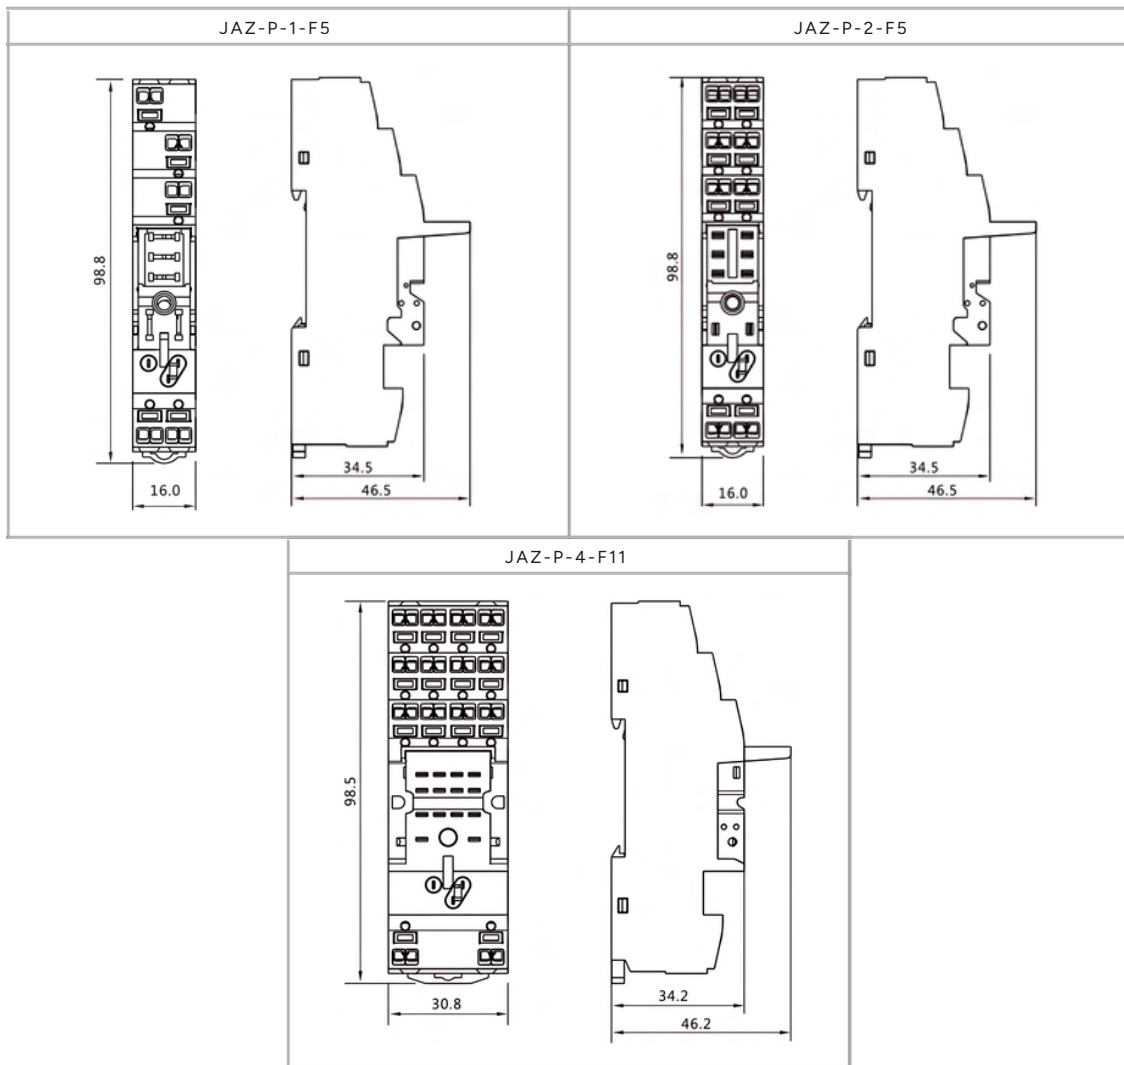

unit: mm

■ Wiring Diagram

