

JAZ-P-1/2/4

Push-in socket

■ Features


- Push-in wiring with integrated push button for wiring connection
- Optional modul insertable
- Connect via bridge
- With printable labels
- CE Certification and cURs Approval
- RoHS compliant




Technical Data

Contact arrangement		1P	2P	4P
Nominal Load	Current (A)	16A	10A	8A
	Voltage (V)	300VAC		
Dielectric strength		2500VAC		
Stripping length		7mm		
Wire size		2x1.5mm 2x16AWG		
Spring locking force		≥60N		
Ambient temperature		-40~+85°C		

■ Socket Select Code

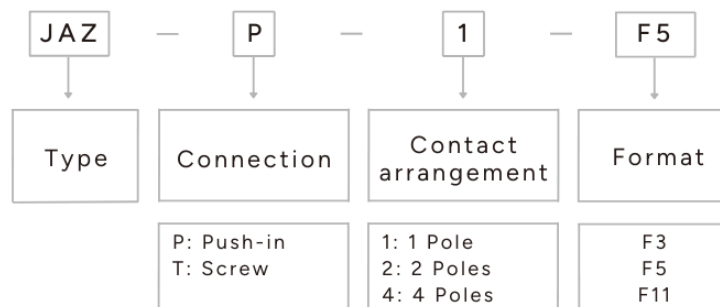

■ Dimensions

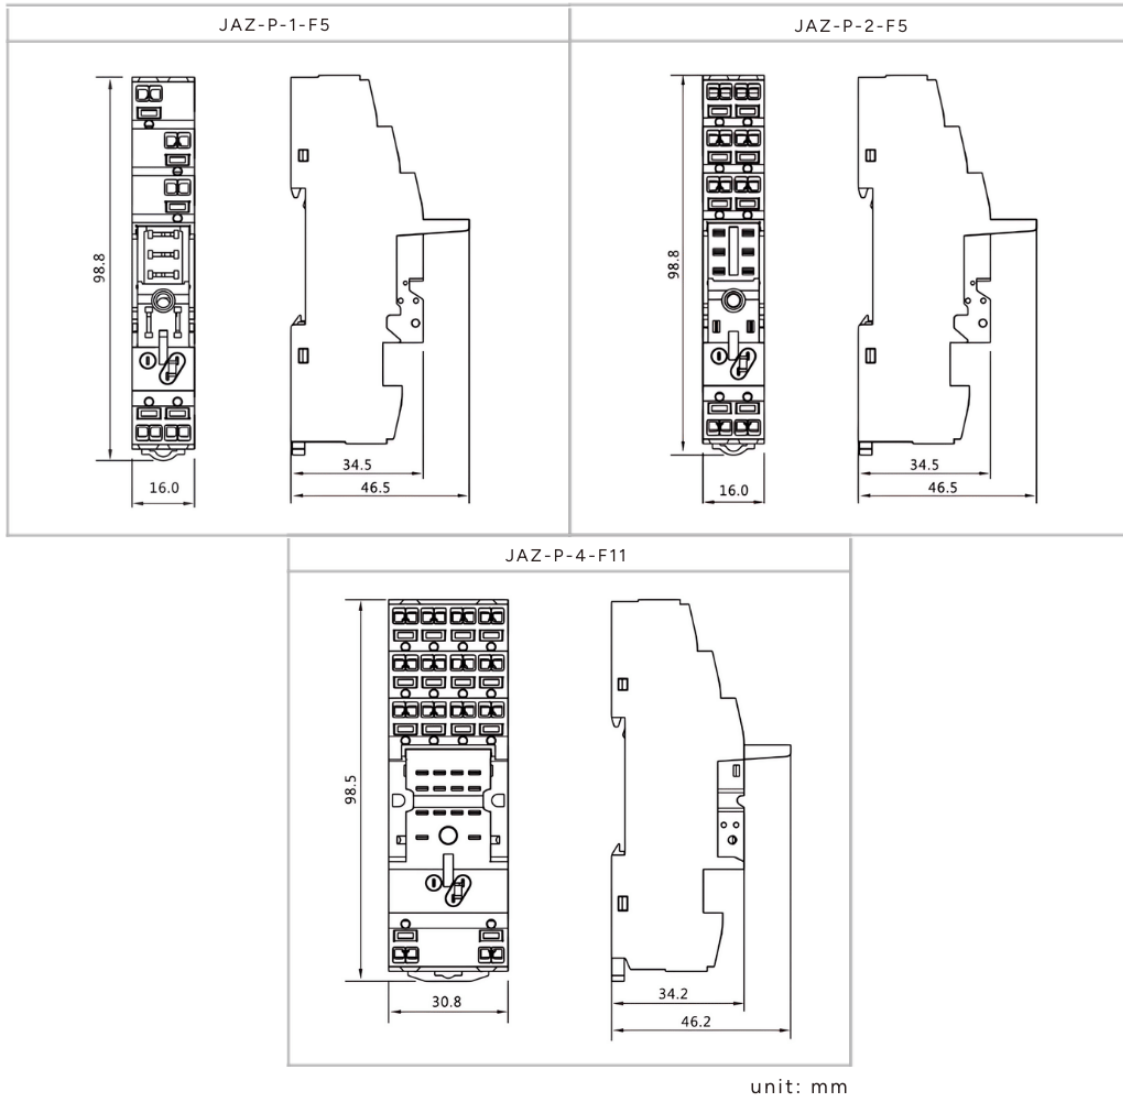

■ Wiring Diagram

