

# JALT70

Tower Light 70mm Series



## ■ Features


- Expandable up to 5 modules
- High-brightness LED for clear status indication
- Flashing and rotating effect lighting modules
- Multiple acoustic signaling solutions
- NPN / PNP compatible
- IP54 protection suitable for industrial environments
- Wide operating temperature range
- Lampshade material: PC; Light body material: ABS
- CE and RoHS compliant




## Technical Data

Standard		IEC/EN 61000-6	
Certification		CE, RoHS	
Ambient temperature	Storage	-40°C to +70°C	
	Operating	-25°C to +55°C	
Operating humidity		45 to 85%RH, non-condensing	
Degree of protection		IP54	
Outer diameter		Ø70 mm	
Connection		Terminal	
Light source		LED	
Rated voltage		12VAC/DC	24VAC/DC
LED current	All Colors	90mA	45mA
Surge current	All Colors	100mA	100mA
Rated insulation voltage (Ui)	IEC60947-1	> 800V	
Operating voltage range	IEC60947-5-1	0.85–1.10 U <sub>n</sub>	
Buzzer	Sound level	85dB	
	Current	18mA	
Frequency	Flashing	About 1Hz	
	Rotating light	About 100 r/min	
Electrical life		About 50,000 hours	

## Socket Select Code

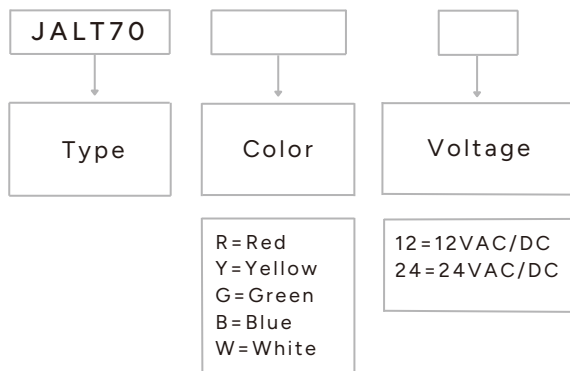

## Dimensions

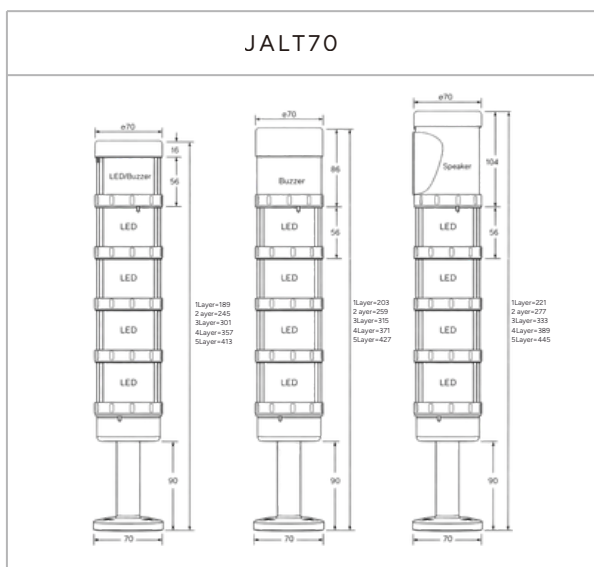

unit: mm

## Wiring Diagram

